

## EMC TEST REPORT

### No. 171202196SHA-001

Applicant : ZHE JIANG JIAJIA RIDE-ON CO., LTD  
Xincang industrial Zone Pinghu City, Zhejiang  
Province, China

Manufacturer : ZHE JIANG JIAJIA RIDE-ON CO., LTD  
Xincang industrial Zone Pinghu City, Zhejiang  
Province, China

Product Name : Children's Car

Type/Model : JJ2255

**TEST RESULT : PASS**

### SUMMARY

The equipment comply with the requirements according to the following standards:

**EN 55014-1: 2006+A1: 2009/+A2:2011:** Electromagnetic compatibility-Requirements for household appliances, electric tools and similar apparatus Part 1: Emission

**EN 55014-2: 2015:** Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity – Product family standard

**EN 61000-3-2: 2014:** Limits for harmonic current emissions(equipment input current  $\leq 16A$  per phase)

**EN61000-3-3:2013:** Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current  $\leq 16A$

Date of issue: January 12, 2018

Prepared by:



Charles Zhang (Project engineer)

Reviewed by:



Edwin Xu (Reviewer)

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>CONTENT</b> .....	<b>2</b>
<b>1.GENERAL INFORMATION</b> .....	<b>5</b>
1.1 Description of Equipment Under Test (EUT).....	5
1.2 Description of Client .....	6
1.3 Description of Test Facility .....	6
<b>2.TEST SPECIFICATIONS</b> .....	<b>7</b>
2.1 Standards .....	7
2.2 Mode of operation during the test / Test peripherals used.....	7
2.3 Instrument list.....	8
2.4.Test Summary.....	11
<b>EMISSION TEST</b> .....	<b>12</b>
<b>3. MAINS/LOAD/CONTROL TERMINAL CONTINUOUS DISTURBANCE VOLTAGE</b> .....	<b>12</b>
3.1 Terminal Voltage Limits for the frequency range 148.5kHz to 30MHz.....	12
3.1.1 Limits for household appliances, electric power tools and similar devices at mains terminals .....	12
3.1.2 Limits for household appliances and similar devices at additional terminals .....	13
3.2 Test setup.....	13
3.3 Test Setup and Test Procedure .....	14
3.4 Test Protocol and Wave Form .....	15
3.5 Measurement Uncertainty.....	17
<b>4. CONTINUOUS DISTURBANCE POWER</b> .....	<b>18</b>
4.1 Disturbance Power Limits for the frequency range 30MHz to 300MHz .....	18
4.1.1 Limits for household and similar appliances .....	18
4.1.2 Limits for electric tools.....	18
4.2 Block Diagram of Test Setup .....	19
4.3 Test Setup and Test Procedure .....	19
4.4 Test Protocol and Wave Form .....	20
4.5 Measurement Uncertainty.....	21
<b>5. MAINS TERMINAL DISCONTINUOUS DISTURBANCE VOLTAGE</b> .....	<b>22</b>
5.1 Block Diagram of Test Setup .....	22
5.2 Test Set-up and Test Procedure .....	22
5.3 Test Protocol and Wave form.....	23
5.4 Measurement Uncertainty.....	23
<b>6. RADIATED EMISSION</b> .....	<b>24</b>
6.1 Radiated emission limit from frequency range 30MHz – 1000MHz.....	24
6.2 Block diagram and test set up.....	24
6.3 Test Protocol and Wave Form .....	25
6.4 Measurement uncertainty.....	27
<b>7. HARMONICS</b> .....	<b>28</b>
7.1 Block Diagram of Test Setup .....	28
7.2 Test Setup and Test Procedure .....	28
7.3 Test Protocol and Wave form.....	28
7.4 Measurement Uncertainty.....	28
<b>8. VOLTAGE FLUCTUATIONS-FLICKER</b> .....	<b>29</b>
8.1 Block Diagram of Test Setup .....	29
8.2 Test Setup and Test Procedure .....	29
8.2.1 Definition.....	29
8.2.2 Test condition .....	29
8.3 Test Protocol.....	30

8.4 Measurement Uncertainty.....	30
<b>IMMUNITY TEST.....</b>	<b>31</b>
<b>9. ELECTROSTATIC DISCHARGE (ESD) .....</b>	<b>33</b>
9.1 Severity Level and Performance Criterion .....	33
9.1.1 Test level .....	33
9.1.2 Performance Criterion .....	33
9.2 Block Diagram of Test Setup .....	34
9.3 Test Setup and Test Procedure .....	35
9.4 Test Protocol.....	35
9.5 Measurement Uncertainty.....	36
9.6 Additions, Deviations and Exclusions from Standards.....	36
<b>10. ELECTROMAGNETIC FIELD SUSCEPTIBILITY .....</b>	<b>37</b>
10.1 Severity Level and Performance Criterion .....	37
10.1.1 Test level .....	37
10.1.2 Performance Criterion .....	37
10.2 Block diagram of test setup .....	38
10.3 Test Setup and Test Procedure .....	38
10.4 Test Protocol.....	39
10.5 Measurement Uncertainty.....	39
10.6 Additions, deviations and exclusions from standards.....	39
<b>11. ELECTRIC FAST TRANSIENT/BURST IMMUNITY TEST.....</b>	<b>39</b>
11.1 Severity Level and Performance Criterion .....	40
11.1.1 Test level .....	40
11.1.2 Performance Criterion .....	40
11.2 Block Diagram of Test Setup .....	41
11.2.1 Block Diagram for input a.c./d.c. power line.....	41
11.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines .....	42
11.3 Test Setup and Test Procedure .....	43
11.5 Measurement Uncertainty.....	43
11.6 Additions, Deviations and Exclusions from Standards.....	43
<b>12. SURGE IMMUNITY TEST.....</b>	<b>44</b>
12.1 Severity Level and Performance Criterion .....	44
12.1.1 Test level .....	44
12.1.2 Performance Criterion .....	44
12.2 Block Diagram of Test Setup .....	45
12.3 Test Setup and Test Procedure .....	45
12.4 Test Protocol.....	46
12.5 Measurement Uncertainty.....	46
12.6 Additions, Deviations and Exclusions from Standards.....	46
<b>13. IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS.....</b>	<b>47</b>
13.1 Severity Level and Performance Criterion .....	47
13.1.1 Test level .....	47
13.1.2 Performance Criterion .....	47
13.2 Block Diagram of Test Setup .....	48
Block Diagram for a.c./d.c input power line.....	48
13.3 Test Setup and Test Procedure .....	50
13.4 Test Protocol.....	50
13.5 Measurement Uncertainty.....	51
13.6 Additions, Deviations and Exclusions from Standards.....	51
<b>14. VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST.....</b>	<b>52</b>
14.1 Severity Level and Performance Criterion .....	52
14.1.1 Test level .....	52
14.1.2 Performance Criterion .....	52
14.2 Block diagram of test setup .....	52

14.3 Test Setup and Test Procedure ..... 53  
14.4 Test Protocol..... 53  
14.5 Measurement Uncertainty..... 53  
14.6 Additions, deviations and exclusions from standards..... 53  
None ..... 53  
**APPENDIX I PHOTOGRAPH OF EQUIPMENT UNDER TEST ..... 54**

## 1. GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product Name : Children's Car  
Description of EUT: This report is based on the original report 171200787SHA-001 dated December 25, 2017, issued by Intertek Testing Service Shanghai. Model in this report is identical with the one in the original report, except the name and shape. No further test need to perform.  
Tested with the battery charger: HKI-D12-1000. The worst data has been listed as representative.  
Model number : JJ2255  
Rating : Battery charger:  
Input: 230V~, 50Hz  
Output: 12VDC, 1000mA  
Mains lead : 1m  
Data cable : none  
EUT type :  Table top  
 Floor standing  
 EUT is toy, defined as :  Category A  
 Category B  
 Category C  
 Category D  
 Category E  
Sample received date : 2017-11-12  
Sample Identification No. : -  
Date of test : 2017-11-12

## 1.2 Description of Client

Applicant : ZHE JIANG JIAJIA RIDE-ON CO., LTD  
Xincang industrial Zone Pinghu City, Zhejiang  
Province, China

Manufacturer : ZHE JIANG JIAJIA RIDE-ON CO., LTD  
Xincang industrial Zone Pinghu City, Zhejiang  
Province, China

## 1.3 Description of Test Facility

Name Intertek Testing Service Shanghai

Address Building 86, No. 1198 Qinzhou Road(North),  
Shanghai 200233, P.R. China

Telephone 86 21 61278200

Telefax 86 21 54262353

### Subcontractor :

Name Shanghai Institute of Measurement Technology

Address 716 Yishan Road, Shanghai 200233, P.R. China

Telephone 86 21 64700066

## **2. TEST SPECIFICATIONS**

### **2.1 Standards**

EN 55014-1: 2006+A1: 2009/+A2:2011: Electromagnetic compatibility-Requirements for household appliances, electric tools and similar apparatus Part 1: Emission

EN 55014-2: 2015: Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity – Product family standard

EN 61000-3-2: 2014: Limits for harmonic current emissions(equipment input current  $\leq 16A$  per phase)

EN 61000-3-3: 2013: Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current  $\leq 16A$

### **2.2 Mode of operation during the test / Test peripherals used**

**Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.**

### 2.3 Instrument list

Conducted Emission ./Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2018-09-12
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2017-12-01
<input checked="" type="checkbox"/>	Absorbing clamp	R&S	MDS 21	EC 2108	2018-05-12
Discontinuous Disturbance Voltage					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	Click meter	AFJ	DDA55	EC 5320	2018-01-17
<input type="checkbox"/>	A.M.N.	AFJ	LS16C	EC 5220-1	2017-12-01
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2018-09-12
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2018-05-30
Harmonics / Flicker / Low-frequency immunity test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	Harmonic-flicker	CI	5001ix-PACS-1	EC 2110	2017-08-23
<input type="checkbox"/>	Three phase Harmonic-flicker system	EM TEST	PFS 503N	EC 5383	2017-12-29
		EM TEST	DPA 503N	EC 5383-1	2018-09-10
ESD					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	ESD generator	TESEQ	NSG 437	EC 4792-4	2018-03-06
EFT/Surge Voltage Dips					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Conduct immunity	EM TEST	UCS 500M6B	EC 2958	2018-04-06



	system				
<input checked="" type="checkbox"/>	Automatic transformer	EM TEST	MV2616	EC 2957	2018-09-03
Conducted Immunity					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Signal generator	R&S	SML 01	EC 2338	2018-09-10
<input checked="" type="checkbox"/>	Power amplifier	AR	75A250	EC 3043-1	2018-07-12
<input checked="" type="checkbox"/>	Attenuator	EM TEST	ATT6/75	EC 3043-3	2018-02-08
<input checked="" type="checkbox"/>	CDN	Schaffner	CDN M216	EC 2113-2	2018-07-27
Radiated Immunity					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Signal generator	R&S	SMR 20	EC 3044-1	2018-02-09
<input checked="" type="checkbox"/>	Power amplifier	AR	250W1000B	EC 5818-2	2018-04-19
<input checked="" type="checkbox"/>	Power amplifier	BONN	BLMA1060-100	EC 5818-4	2018-04-19
<input checked="" type="checkbox"/>	Log-period antenna	AR	AT 1080	EC 3044-7	2018-08-15
<input checked="" type="checkbox"/>	Field meter	AR	FL17000	EC 5818-1	2018-05-19
<input checked="" type="checkbox"/>	Power sensor	Keysight	N1914A	EC 5818-3	2018-04-19
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2018-01-08
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2839	2018-01-08
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2018-03-09
<input checked="" type="checkbox"/>	Fully-anechoic chamber	Albatross project	-	EC 3047	2018-03-09
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date

<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 2323	2018-06-14
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3324	2018-04-09
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3325	2018-03-23
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2018-03-29
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2018-06-28

## 2.4. Test Summary

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST ITEM	RESULT	NOTE
Mains terminal continuous disturbance voltage *	Pass	
Mains terminal discontinuous disturbance voltage/click	NA	
Continuous disturbance power*	Pass	
Radiated emission	Pass	
Harmonics	Pass	
Voltage fluctuation-Flicker	Pass	
Electrostatic Discharge (ESD)	Pass	
Radiated field susceptibility	Pass	
Electric Fast Transient /Burst (EFT/B)	Pass	
Surge	Pass	
Injected current	Pass	
Voltage dips and interruption	Pass	

Notes: 1: NA =Not Applicable

\* : According to clause 7.1.4 of the standard EN55014-1, a test at 160 kHz (conducted emission) and at 50 MHz (disturbance power) was made over a range of 0,9 to 1,1 times the rated voltage, and the worst test data is listed in relevant clause of the report.

## Emission Test

### 3. Mains/Load/Control Terminal Continuous Disturbance Voltage

**Test result: PASS**

#### 3.1 Terminal Voltage Limits for the frequency range 148.5kHz to 30MHz

3.1.1 Limits for household appliances, electric power tools and similar devices at mains terminals  
For household appliance

Frequency range (MHz)	Limits dB( $\mu$ v)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	59 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

Note : 1. \* means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz  
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

For electric power tools

Frequency (MHz)	Rated motor power not exceeding 700W		Rated motor power above 700W and not exceeding 1000W		Rated motor power above 1000W	
	dB( $\mu$ V)		dB( $\mu$ V)		dB( $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.35	66-59*	59-49*	70-63*	63-53*	76-69*	69-59*
0.35-5	59	49	63	53	69	59
5-30	64	54	68	58	74	64

Notes : 1. \* means the limit value decreasing linearly with the logarithm of the frequency.  
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.


### 3.1.2 Limits for household appliances and similar devices at additional terminals

Frequency range (MHz)	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	80	70
0.5 ~ 5	74	64
5 ~ 30	74	64

Note: 1. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

### 3.2 Test setup


At mains terminal

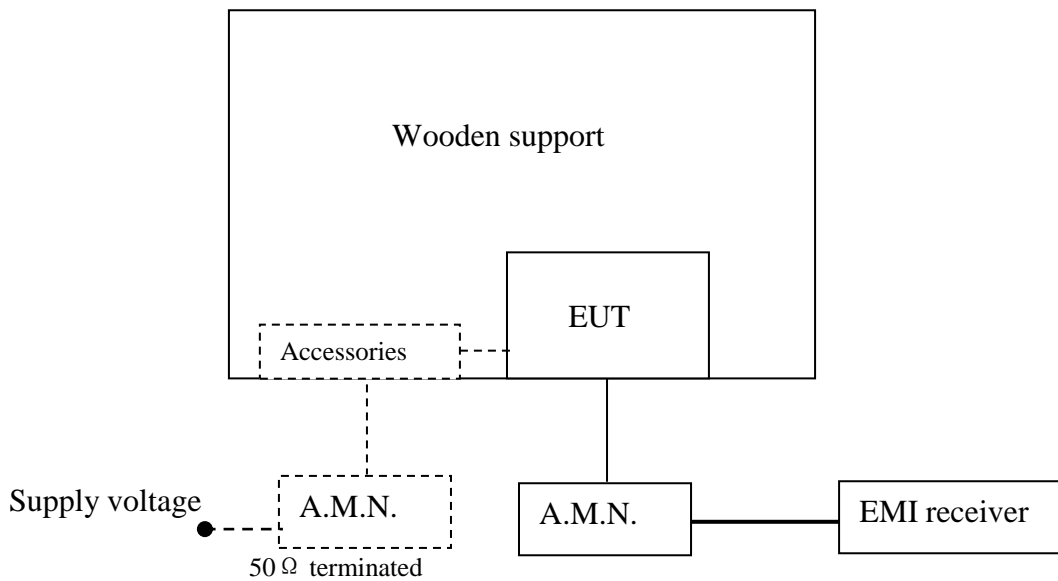

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.

At output and control terminals

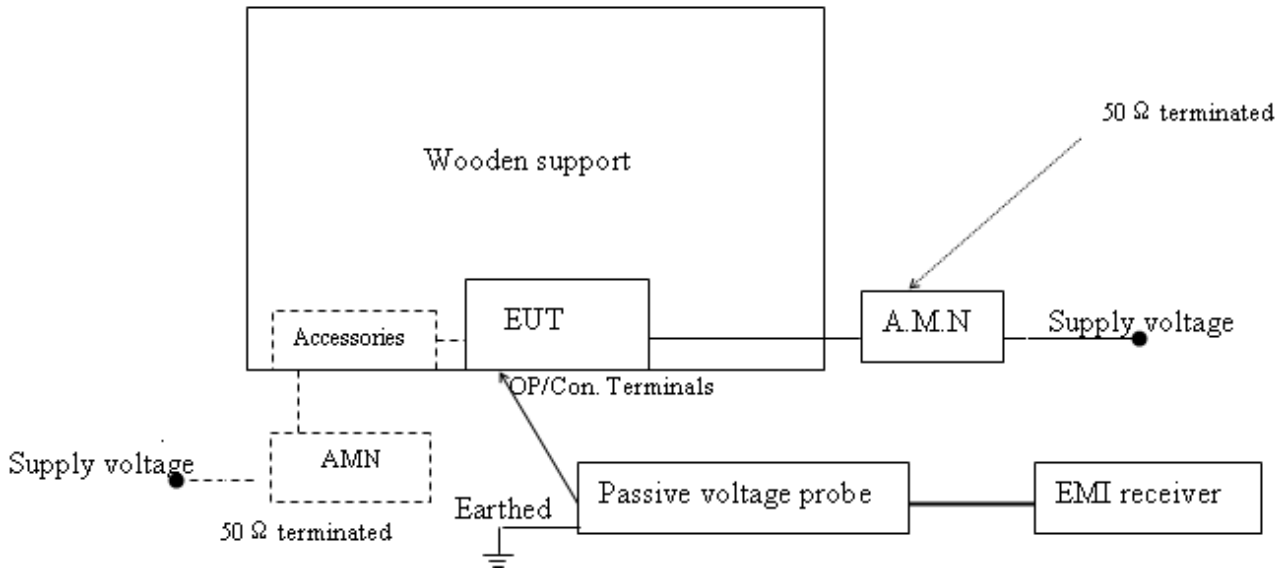

Note:   
 ————— : power line  
 ————— : signal line  
 - - - - - : means the test setup while available

### 3.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were following clause 5.1.1, 5.1.2, 5.1.3, 5.1.4 and 5.1.5 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was follow EN 55014-1 clause 5.2.

Measurement methods and operation conditions of EUT was according to clause 7 of EN 55014-1.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9kHz.


### 3.4 Test Protocol and Wave Form

Temperature : 24 °C

Relative Humidity: 42 %

**At mains terminal: Pass**


L line:

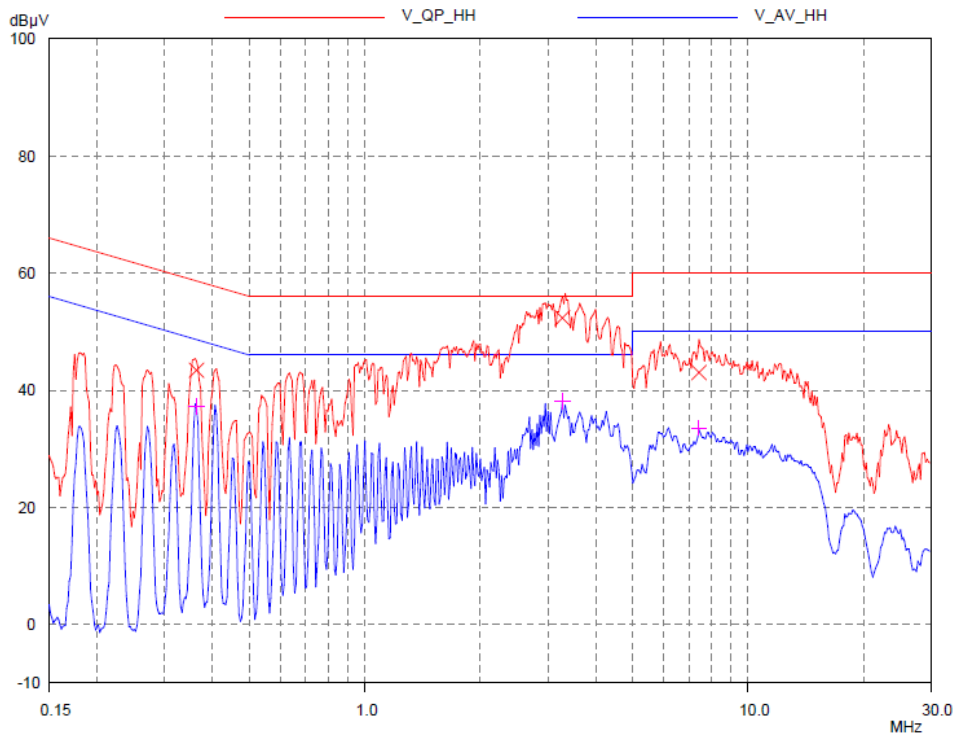

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB
0.36325	43.39	58.65	15.26
3.27579	52.34	56.00	3.66
7.44306	43.03	60.00	16.97

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB
0.36325	37.25	48.65	11.40
3.27579	38.09	46.00	7.91
7.44306	33.53	50.00	16.47

N line:

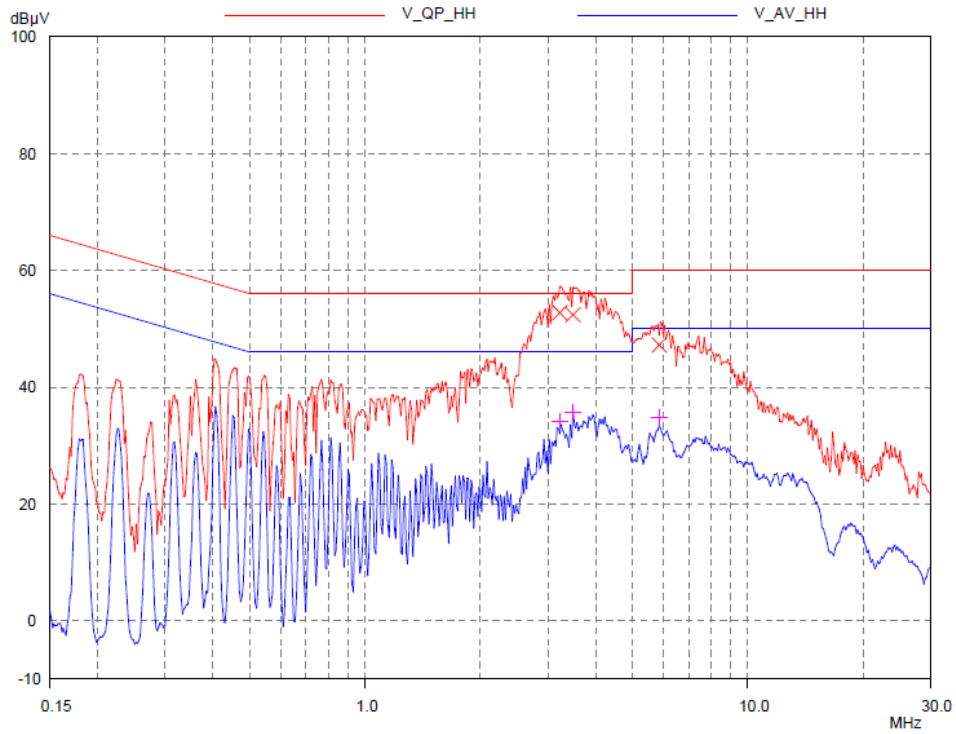

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB
3.224	52.74	56.00	3.26
3.49141	52.41	56.00	3.59
5.86051	47.23	60.00	12.77

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB
3.224	34.23	46.00	11.77
3.49141	35.70	46.00	10.30
5.86051	34.76	50.00	15.24



**At load/control terminal: NA**

Frequency (MHz)	Quasi-peak		Average	
	Disturbance level dB( $\mu$ V)	Permitted limit dB( $\mu$ V)	Disturbance level dB( $\mu$ V)	Permitted limit dB( $\mu$ V)
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Note: \* means the emission level 20dB below the relevant limit.

### 3.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty at mains terminal:  $\pm 3.19$ dB

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

## 4. Continuous Disturbance Power

**Test result: PASS**

### 4.1 Disturbance Power Limits for the frequency range 30MHz to 300MHz

#### 4.1.1 Limits for household and similar appliances

Frequency (MHz)	Quasi-peak dB(pW)	Average dB (pW)
30 to 300	45 to 55*	35 to 45*


Note: 1. \* means the limit increasing linearly with the frequency.  
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement with the receiver with average detector need not be carried out.

#### 4.1.2 Limits for electric tools

Frequency (MHz)	Rated motor power not exceeding 700W		Rated motor power above 700W and not exceeding 1000W		Rated motor power above 1000W	
	dB(pW)		dB(pW)		dB(pW)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
30-300	45-55*	35-45*	49-59*	39-49*	55-65*	45-55*

Notes: 1. \* means the limit increasing linearly with the frequency.  
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement with the receiver with average detector need not be carried out.

## 4.2 Block Diagram of Test Setup

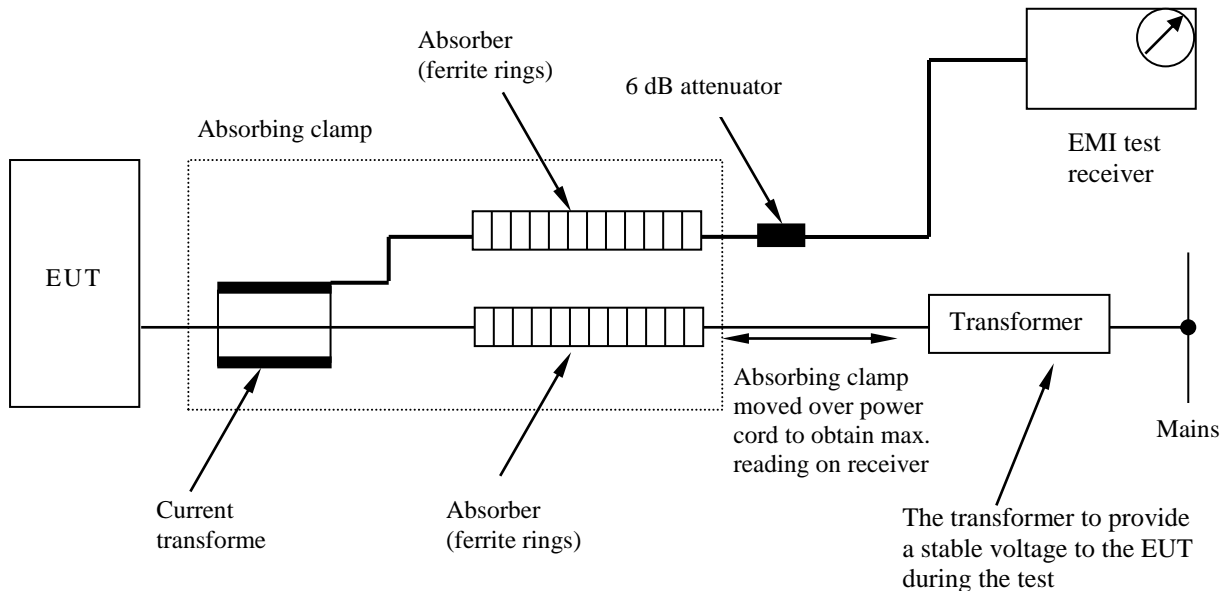

## 4.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Instruments used were follow EN 55014-1 clause 6.1.

Detailed test procedure and arrangement was follow EN 55014-1 clause 6.2 and 6.3.


Operation conditions of EUT were according to EN 55014-1 clause 7.

Frequency range 30MHz – 300MHz was checked and EMI receiver measurement bandwidth was set to 120kHz.

**4.4 Test Protocol and Wave Form**

Temperature : 24 °C  
Relative Humidity: 42 %

**At mains lead: Pass**

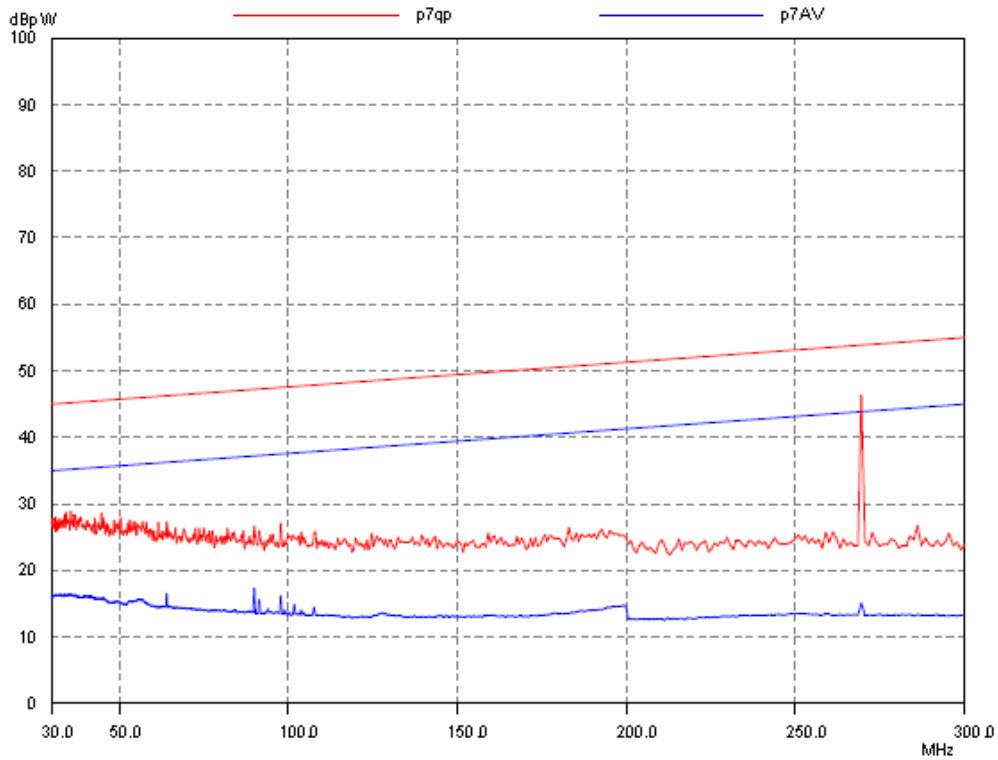

**At auxiliary leads: NA**

Frequency (MHz)	Quasi-peak		Average	
	Disturbance level dB(pW)	Permitted limit dB(pW)	Disturbance level dB(pW)	Permitted limit dB(pW)
30.00	-	-	-	-
45.00	-	-	-	-
65.00	-	-	-	-
90.00	-	-	-	-
150.00	-	-	-	-
180.00	-	-	-	-
220.00	-	-	-	-
300.00	-	-	-	-

Note: \* means the emission level 20dB lower than the relevant limit.

#### **4.5 Measurement Uncertainty**

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of mains lead and auxiliary lead:  $\pm 4.35\text{dB}$


The measurement uncertainty is given with a confidence of 95%,  $k=2$

The measurement uncertainty is traceable to internal procedure TI-036.

## 5. Mains Terminal Discontinuous Disturbance Voltage

**Test result:** NA

### 5.1 Block Diagram of Test Setup

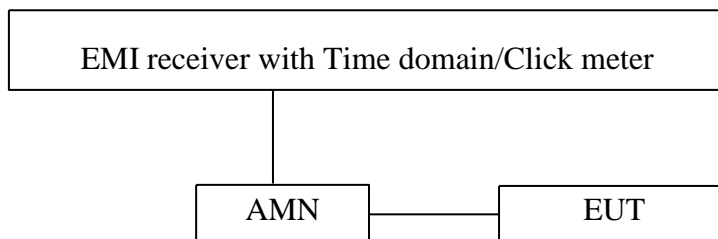

### 5.2 Test Set-up and Test Procedure

Measurement was performed in shielded room.

EMI receiver compliance to CISPR 16-1-1 with time domain function used during measurement.

EUT arrangement was follow EN 55014-1 clause 5.2.

Operation conditions were follow EN 55014-1 clause 7.

0.15MHz, 0.5MHz, 1.4MHz and 30MHz were spot checked, and upper quartile methods used during measurement.

The final judgment of test result was according to figure 9 of EN 55014-1.

### 5.3 Test Protocol and Wave form

Temperature : °C  
Relative Humidity: %

Frequency (MHz)	0.15	0.5	1.4	30.0
Permitted limit for continuous interference (dB $\mu$ V)	66.0	56.0	56.0	60.0
Counted click/switch operation number				
Observed time (min)				
Click duration (ms)				
Click rate N				
Factor				
Permitted limits for clicks (dB $\mu$ v)				
Counted clicks exceeding the limits				
Test result				
Any other descriptions:				

### 5.4 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of mains lead and auxiliary lead:  $\pm 3.76$ dB

The measurement uncertainty is given with a confidence of 95%, k=2

The measurement uncertainty is traceable to internal procedure TI-036.

## 6. Radiated emission

### Test result: Pass


☒ As for in the disturbance power test all emission readings from the EUT are lower than the applicable limits (Table 2a) reduced by the margin (Table 2b) and the maximum clock frequency is less than 30MHz, the EUT is deemed to comply with the Radiated Emission requirement without test.

### 6.1 Radiated emission limit from frequency range 30MHz – 1000MHz

Frequency (MHz)	Permitted limit in dB $\mu$ V/m (Quasi-peak) of Measurement Distance 3m	Permitted limit in dB $\mu$ V/m (Quasi-peak) of Measurement Distance 10M
30-230	40	30
230-1000	47	37

Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.

### 6.2 Block diagram and test set up

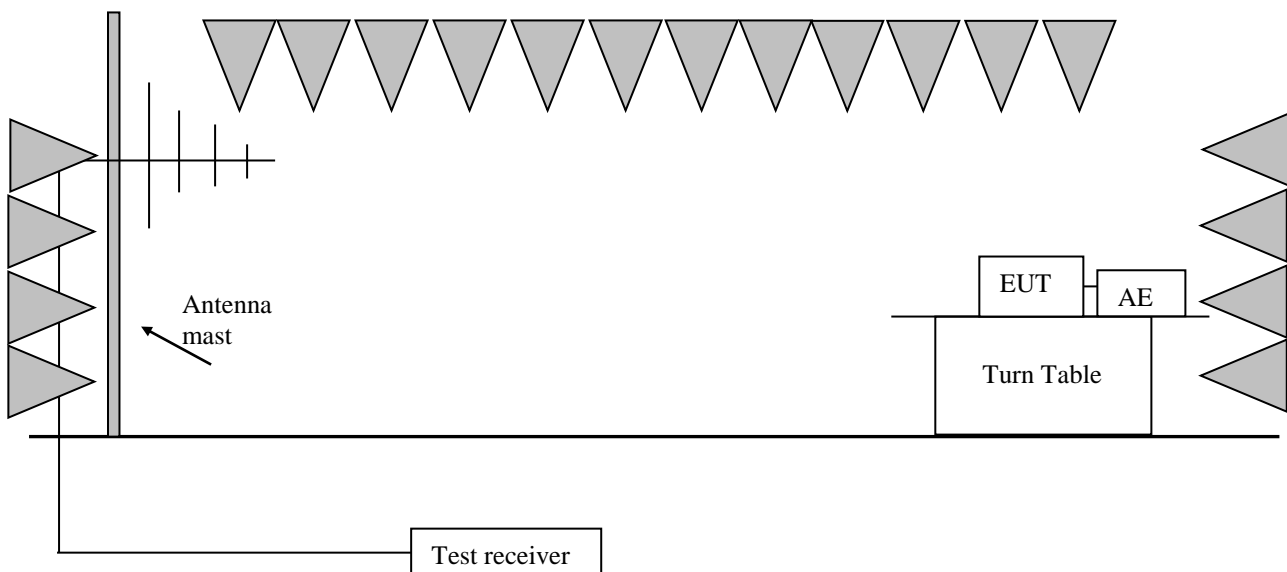

The measurement was applied in a 3 m semi-anechoic chamber.

Measurement was performed according to CISPR 22.

Setting of EUT is according to EN 55014-1 clause 7.3.6.2.3

The bandwidth setting on R&S Test Receiver ESI26 was 120kHz.

The frequency range from 30MHz to 1000MHz was checked.




**6.3 Test Protocol and Wave Form**


Temperature: 24 °C      Relative humidity: 42 %

EUT operating without charging mode:

Horizontal:

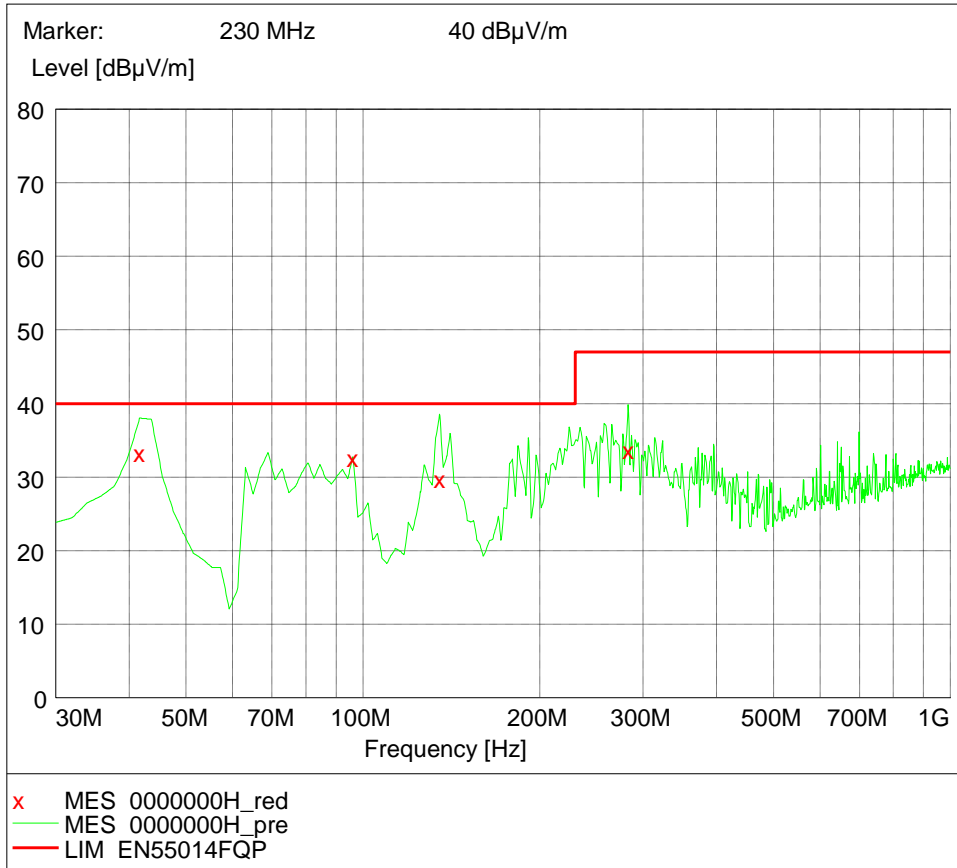

Vertical:

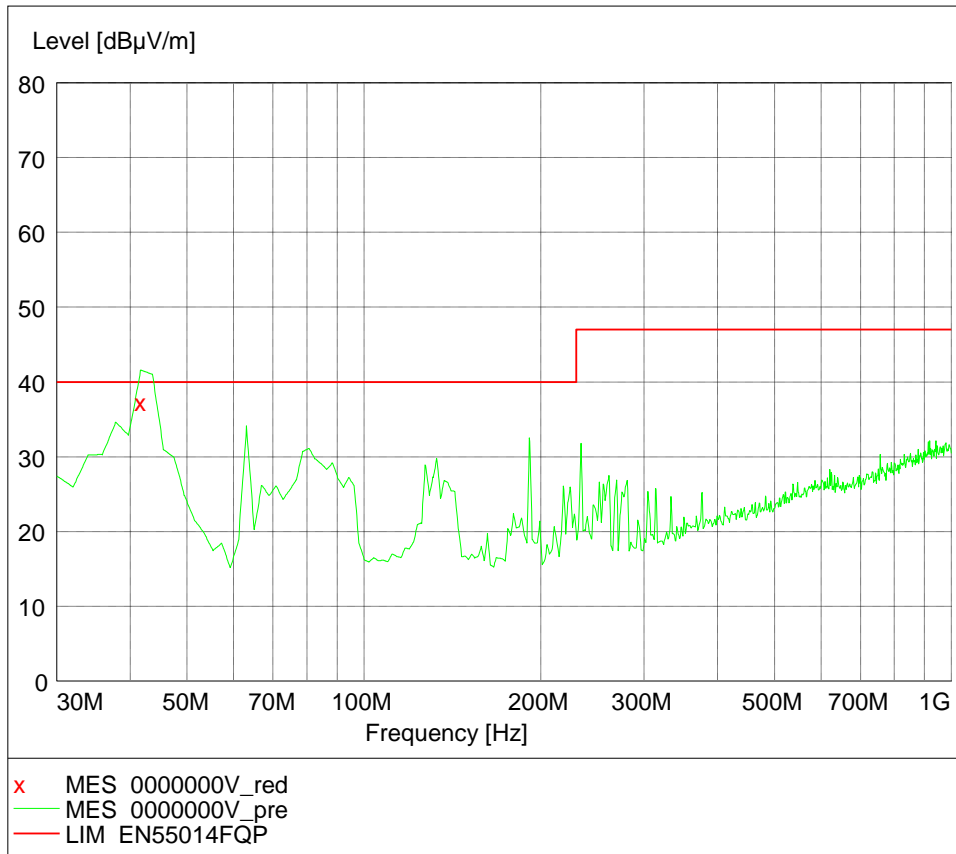

Polarization	Frequency (MHz)	Emission level (dBµV/m)	Limits (dBµV/m)	Margin (dB)
Horizontal	42.7	32.7	40	7.3
	96.0	31.0	40	9.0
	143.0	30.0	40	10.0
	286.0	32.6	47	14.4
	298.31	*	47	*
	332.56	*	47	*
Vertical	42.5	37.0	40	3.0
	76.88	*	40	*
	132.45	*	40	*
	276.83	*	47	*
	287.35	*	47	*
	388.22	*	47	*

Note: \* means margin >20dB.

#### **6.4 Measurement uncertainty**

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated emission is:  $\pm 4.90\text{dB}(30\text{-}1000\text{MHz})$


The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

## 7. Harmonics

**Test result:** **PASS**

### 7.1 Block Diagram of Test Setup

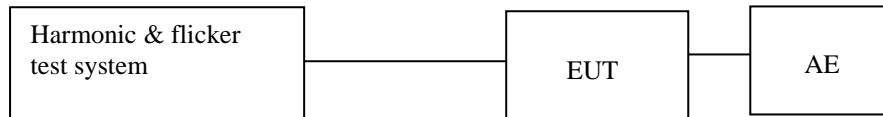

### 7.2 Test Setup and Test Procedure

Harmonics of the fundamental current were measured up to 40 order harmonics using a digital power meter with an analogue output and frequency analyser which was integrated in the harmonic & flicker test system. The measurements were carried out under steady conditions.

- Measuring instrumentation according to IEC 61000-4-7:2002+A1:2008
- This product is not defined as lighting equipment, and has rated power less than 75W, therefore, no limit apply according to EN 61000-3-2
- The EUT is kitchen machines as listed in the scope of IEC 60335-2-14, therefore, is deemed to conform to the harmonic current limits of this standard without further testing.

### 7.3 Test Protocol and Wave form

Temperature : °C  
Relative Humidity: %

### 7.4 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of harmonic test is:  $\pm 3.90\%$


The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

## 8. Voltage Fluctuations-Flicker

Test result                      **PASS**

### 8.1 Block Diagram of Test Setup

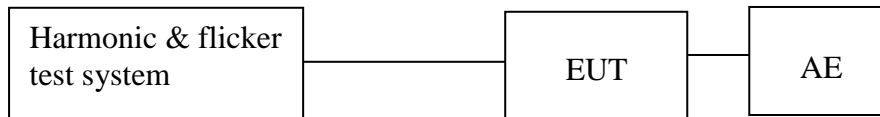

### 8.2 Test Setup and Test Procedure

#### 8.2.1 Definition

Flicker: impression of unsteadiness of visual sensation induced by a lighting stimulus whose luminance or spectral distribution fluctuates with time.

Pst: Short-term flicker indicator The flicker severity evaluated over a short period (in minutes); Pst=1 is the conventional threshold of irritability

Plt: long-term flicker indicator; the flicker severity evaluated over a long period (a few hours). Using successive Pst values.

dc: the relative steady-state voltage change

dmax: the maximum relative voltage change

d(t): the value during a voltage change

#### 8.2.2 Test condition

The EUT was set to produce the most unfavorable sequence of voltage changes.

### 8.3 Test Protocol

The tested object operated under the operating condition specified in EN 61000-3-3  
The following limits apply

- “Plt” shall not exceed 0.65.
- “Pst” shall not exceed 1.0.
- “dc” shall not exceed 3.3%.
- d(t) shall not exceed 3.3% for more than 500ms.
- “dmax” shall not exceed:
  - 4% without additional conditions,
  - 6% switched manually or automatically more than twice per day
  - 7% attended whilst in use or switched automatically for no more than twice per day or attended while in use
  - for manual switch, dmax is measured in accordance with Annex B of standard, average dmax is calculated from 24 times measurement.
  - The rate power of the EUT is no greater than 75W, which is unlikely to produce significant voltage fluctuations or flicker by technical analysis and evaluation. So it is deemed to fulfil the requirements without testing.

Temperature : °C

Relative Humidity : %

### 8.4 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of voltage fluctuation and flicker is:  $\pm 10.34\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

## Immunity Test

### Performance criteria

The performance criteria are based on the general criteria of the standard and derived from the product specification

**Criterion A:** Normal Performance within limits specified by the manufacturer, request or purchaser.

**Criterion B:** Continue to operate as intended after the test .No degradation of performance or loss of function. During the test degradation of performance is allowed, however no change of actual operating state or stored data.

**Criterion C:** Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

### Basic EMC standard for immunity test

IEC 61000-4-2: 2008: Electromagnetic Compatibility (EMC) – Part 4- 2: testing and measurement techniques – electrostatic discharge immunity test

IEC 61000-4-3: 2006/+A1:2007/+A2:2010: Electromagnetic Compatibility (EMC) – Part 4- 3: testing and measurement techniques – radiated, radio frequency, electromagnetic field immunity test

IEC61000-4-4: 2012: Electromagnetic Compatibility (EMC) – Part 4- 4: testing and measurement techniques – electric fast transient/burst immunity test

IEC 61000-4-5: 2014: Electromagnetic Compatibility (EMC) – Part 4- 5: testing and measurement techniques – section 5: surge immunity test

IEC 61000-4-6: 2013: Electromagnetic Compatibility (EMC) – Part 4- 6: testing and measurement techniques – section 6: immunity to conducted disturbance, induced by radio frequency field

IEC61000-4-11: 2004: Electromagnetic Compatibility (EMC) – Part 4- 11: testing and measurement techniques – section 11: voltage dips, short interruption and voltage variations immunity test

**Categories of apparatus**

For battery charging mode:

Category II (Shall fulfill the tests: ESD, EFT, Inject current, Surge, Dips)

For operating without charging mode:

Category III (Shall fulfill the tests: ESD, EM fields\*)

Category IV (Shall fulfill the tests: ESD, EFT, Inject current, Surge, Dips, EM fields)

Note: \* For toys, the radio frequency electromagnetic fields test is only applicable for ride on toys.



## 9. Electrostatic Discharge (ESD)

Test result **PASS**

### 9.1 Severity Level and Performance Criterion

#### 9.1.1 Test level

1a – Contact discharge		1b – Air discharge	
Level	Test voltage kV	Level	Test voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15
X	Special	X	Special

Notes: 1. “X” is an open level. The level has to be specified in the dedicated equipment specification. If higher voltages than those shown are specified, special test equipment may be needed.  
2. The gray rows were the selected test level.


#### 9.1.2 Performance Criterion

Performance criterion: **C** (Only applied to toys not using score or data entered by the user)

Performance criterion: **B** (Others)


## 9.2 Block Diagram of Test Setup

☒ For table-top equipment

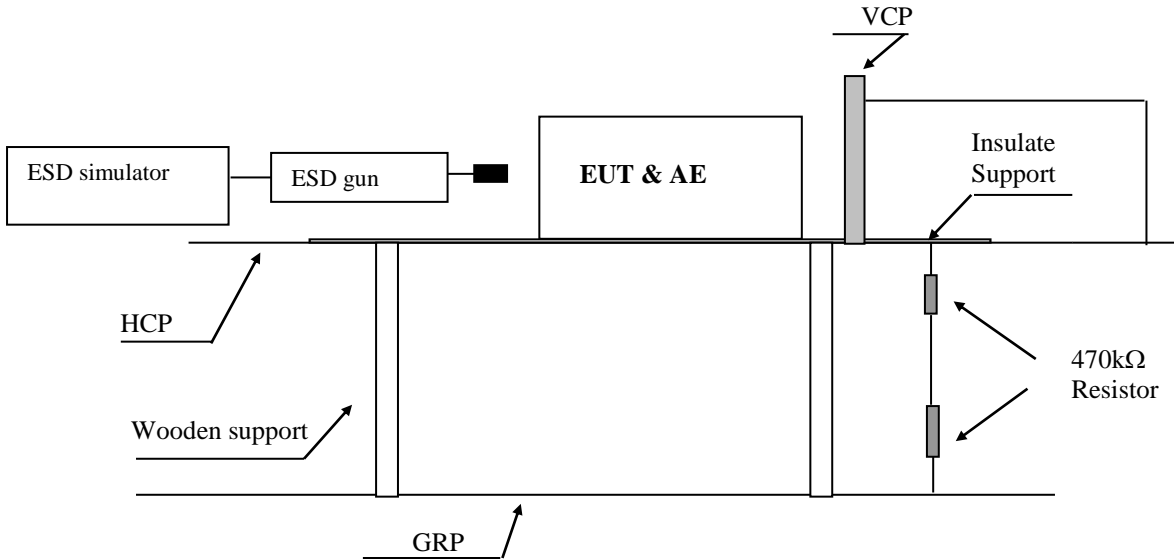

Note: HCP means Horizontal Coupling Plane  
VCP means Vertical Coupling Plane  
GRP means Ground Reference Plane  
Wooden support is a 0.8m height table

☒ For floor standing equipment

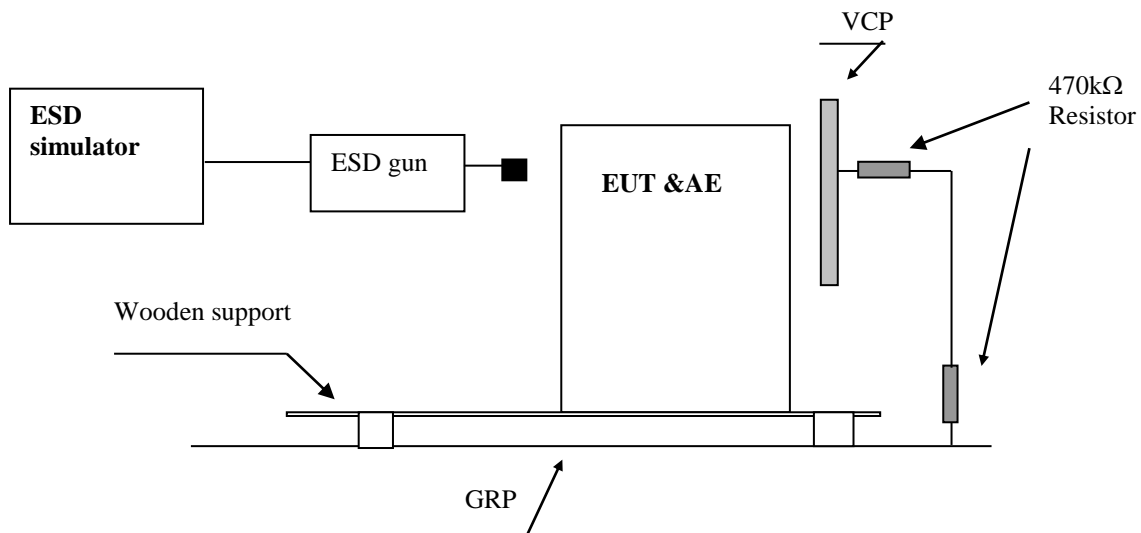

Note: VCP means Vertical Coupling Plane  
GRP means Ground Reference Plane  
Wooden support is a 0.1m height rack

### 9.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC61000-4-2 clause 7.1.

The test method and equipment was specified by IEC61000-4-2 with the modifications by EN55014-2 clause 5.1.

### 9.4 Test Protocol

Temperature : 24 °C  
Relative Humidity : 42 %  
Air Pressure : 101 kPa

Direct discharges were applied at the following selected points:

Test point #	Test level [kV]	Air/ Contact	Polarity (+/-)	Pass/ Fail	Comment
A	2/4	Contact	+/-	Pass	All touchable screws of enclosure
B	2/4	Contact	+/-	Pass	Accessible metal parts of the EUT
C	2/4/8	Air	+/-	Pass	Air gap of the switch, button
D	2/4/8	Air	+/-	Pass	The air in-taking opening
E	2/4/8	Air	+/-	Pass	Slots around the EUT

Indirect contact discharges were applied to the VCP and the HCP at the following selected points:

For table top equipment

Point	Description	Point	Result
HCP f	0,1m from the front of the EUT	Edge of centre,corner on HCP	Pass
HCP b	0,1m from the back of the EUT	Edge of centre,corner on HCP	Pass
HCP r	0,1m from the right side of the EUT	Edge of centre,corner on HCP	Pass
HCP l	0,1m from the left side of the EUT	Edge of centre,corner on HCP	Pass
VCP f	0,1m from the front of the EUT	Edge of centre,corner on VCP	Pass
VCP b	0,1m from the back of the EUT	Edge of centre,corner on VCP	Pass
VCP r	0,1m from the right of the EUT	Edge of centre,corner on VCP	Pass
VCP l	0,1m from the left of the EUT	Edge of centre,corner on VCP	Pass

For floor standing equipment

Point	Description	Point	Result
VCP f	0,1m from the front of the EUT	Edge of centre,corner on VCP	Pass
VCP b	0,1m from the back of the EUT	Edge of centre,corner on VCP	Pass
VCP r	0,1m from the right of the EUT	Edge of centre,corner on VCP	Pass
VCP l	0,1m from the left of the EUT	Edge of centre,corner on VCP	Pass

**Observation:** All the functions were operated as normal during and after test.

**Conclusion:** The EUT met the requirements of Performance A

### 9.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of ESD test is:  $\pm 6.65 \%$

The measurement uncertainty is given with a confidence of 95%, k=2.

The measurement uncertainty is traceable to internal procedure TI-036.

### 9.6 Additions, Deviations and Exclusions from Standards

None

## 10. Electromagnetic field susceptibility

**Test result**                      **Pass**

This test is only applicable to the EUT operating without charging mode.

### 10.1 Severity Level and Performance Criterion


#### 10.1.1 Test level

Level	Test field strength V/m
1	1
2	3
3	10
X	Special
<p>Note: 1. X is an open test level. This level may be given in the product specification. 2. The gray row is the selected test level.</p>	

#### 10.1.2 Performance Criterion

Performance criterion: **A**

## 10.2 Block diagram of test setup

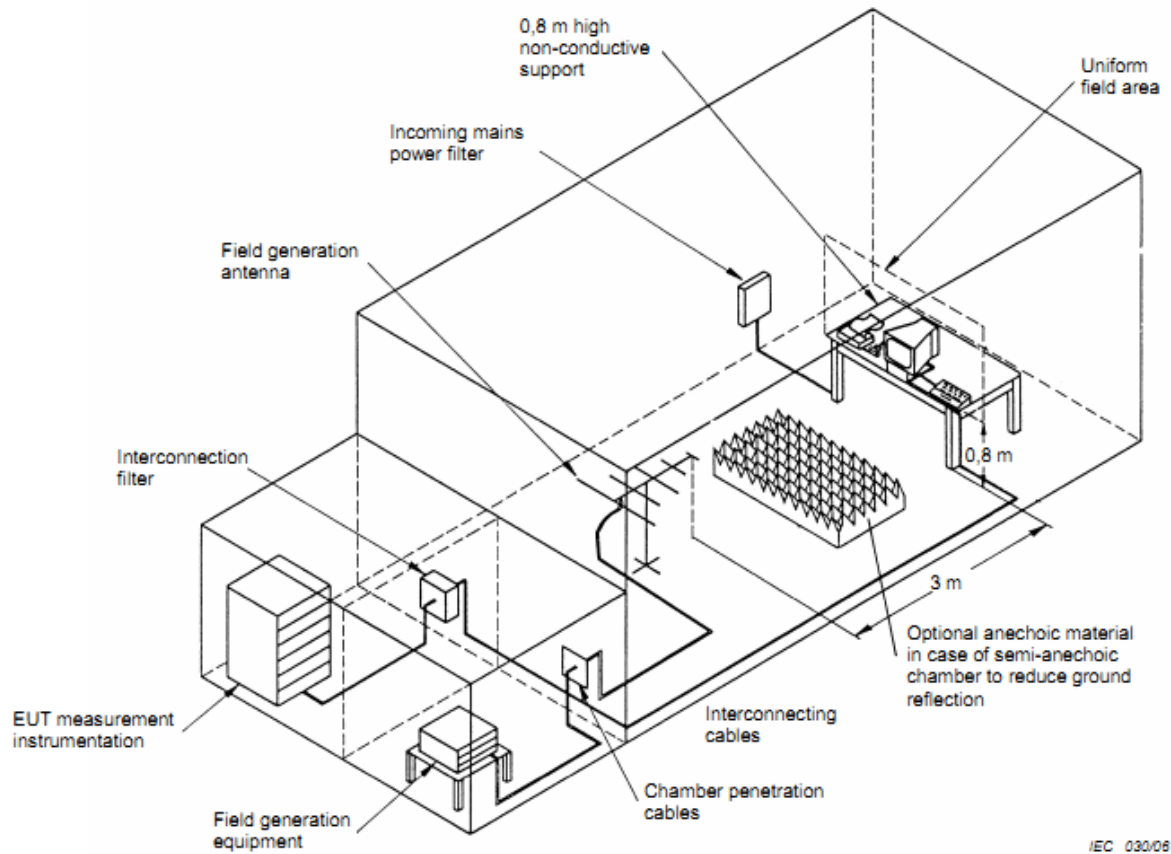

## 10.3 Test Setup and Test Procedure

Measurement was performed in full-anechoic chamber.  
Measurement and setting of EUT was applied according to IEC61000-4-3 clause 7.

The test method and equipment was specified by IEC61000-4-3 with additions and modifications by EN55014-2 clause 5.5.

#### 10.4 Test Protocol

Temperature : 24°C  
Relative Humidity: 42%

Test no.:	Frequency (MHz)	Polarization	Test level V/m	Modulation	Exposed location	Result	Comment
1	80-1000	H & V	3	1kHz, 80%, SW, AM, 1% step size	All sides	Pass	-

**Observation:** All the functions were operated as normal during and after test.

**Conclusion:** The EUT met the requirements of Performance A

#### 10.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated susceptibility test is:  $\pm 2.38\text{dB}$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

#### 10.6 Additions, deviations and exclusions from standards

None

### 11. Electric Fast Transient/Burst Immunity Test

**Test result**                      **Pass**

## 11.1 Severity Level and Performance Criterion

### 11.1.1 Test level

Open circuit output test voltage (+/-10%) and repetition rate of the impulses (+/- 20%)				
Level	On power supply ports PE		On I/O (input & output) signal, data and control ports	
	Voltage peak kV	Repetition rate kHz	Voltage peak kV	Repetition rate kHz
1	0.5	5	0.25	5
2	1	5	0.5	5
3	2	5	1	5
4	4	2.5	2	5
X	Special	Special	Special	Special

Notes : 1. "X" is a an open level. The level has to be specified in the dedicated equipment specification.  
2. The gray rows were the selected test level.

### 11.1.2 Performance Criterion


Performance criterion **B**




## 11.2 Block Diagram of Test Setup

### 11.2.1 Block Diagram for input a.c./d.c. power line

For table-top equipment

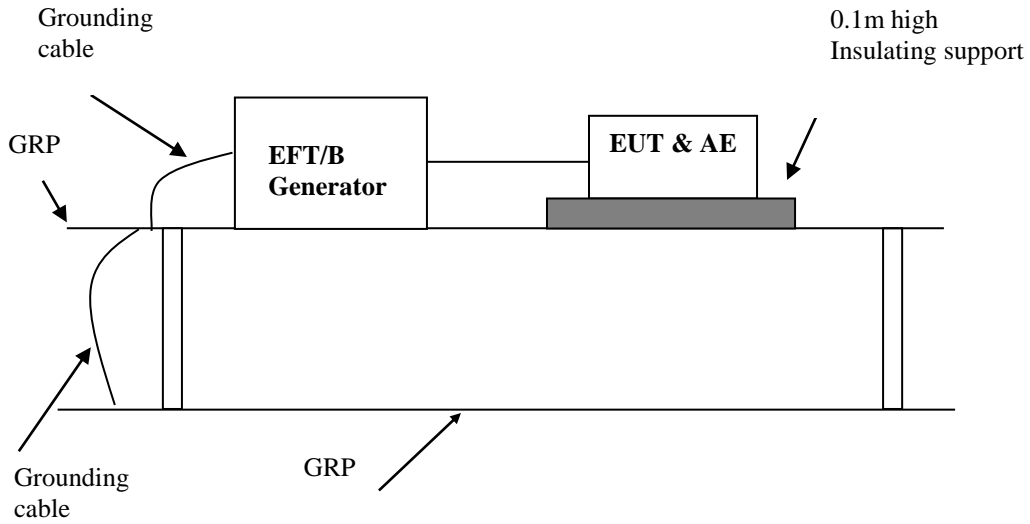


For floor standing equipment

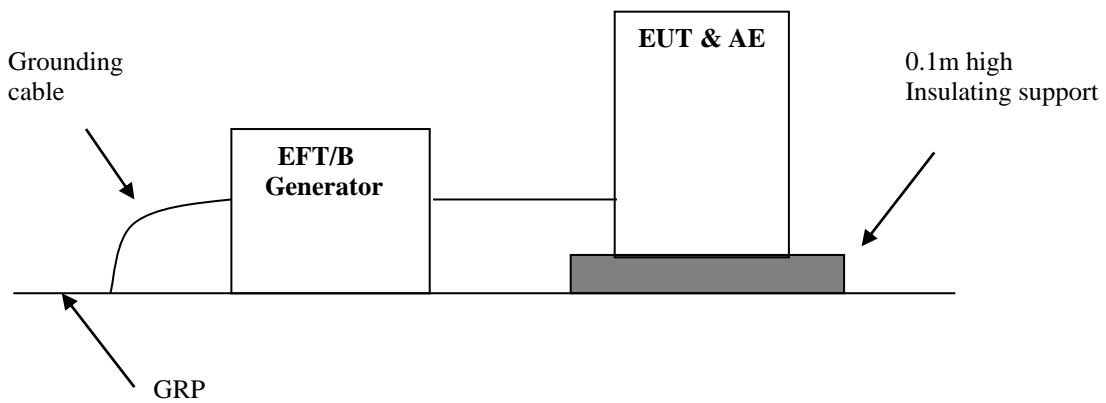


11.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

For table-top equipment

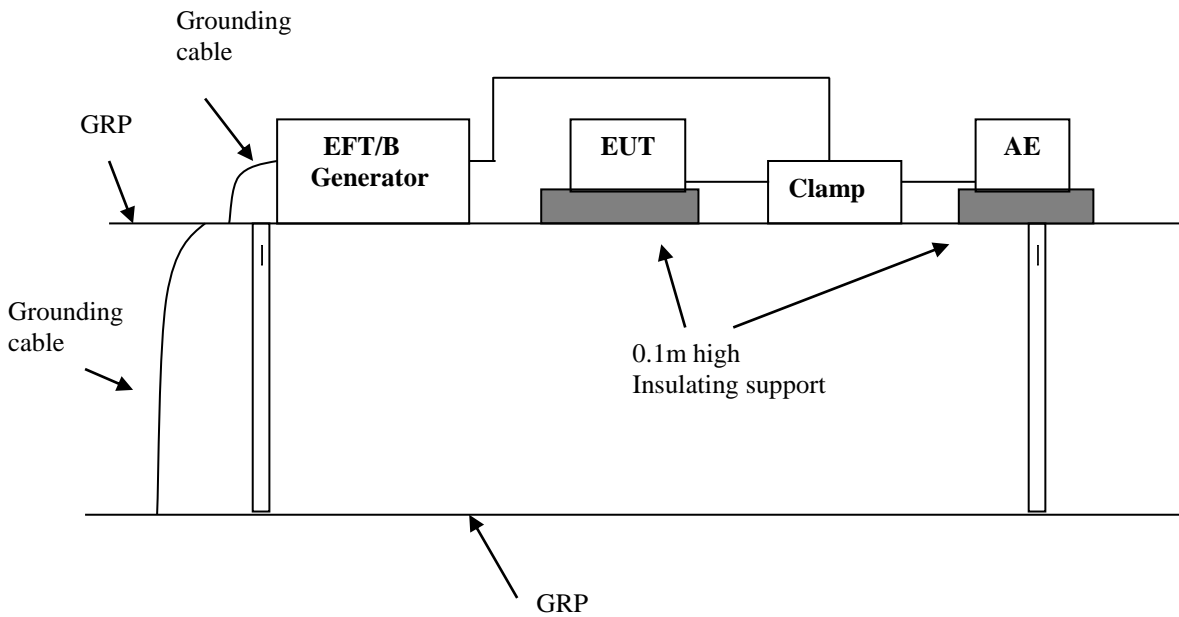

For floor standing equipment

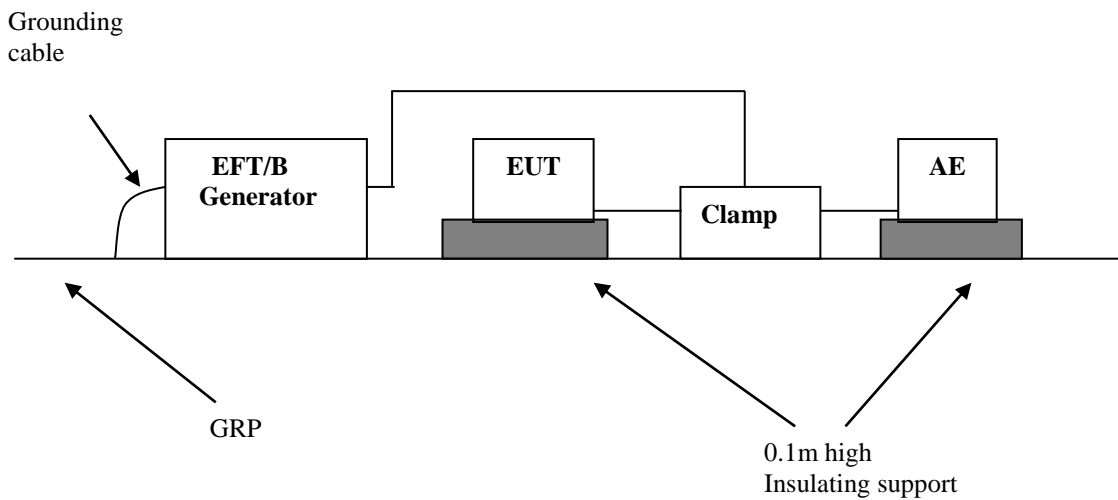

### 11.3 Test Setup and Test Procedure

Measurement was performed in shielded room.  
Measurement and setting of EUT was applied according to IEC61000-4-4 clause 7.2.  
The test method and equipment was specified by IEC61000-4-4 with additions and modifications by EN55014-2 clause 5.2.

### 11.4 Test Protocol

Temperature : 24 °C  
Relative Humidity: 42 %

Test No.	Level [kV]	Polarity +/-	Repetition rate kHz	Line for test	Pass/Fail
1	0.5	+/-	5	Signal lines and control lines	NA
2	0.5	+/-	5	d.c. power ports	NA
3	1	+/-	5	a.c. power ports	Pass

Notes: "NA" means not applicable.

**Observation:** All the functions were operated as normal during and after test.

**Conclusion:** The EUT met the requirements of Performance A

### 11.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of EFT test at main terminal is:  $\pm 11.57\%$

Measurement uncertainty of EFT test at signal/telecom terminal is:  $\pm 11.62\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

### 11.6 Additions, Deviations and Exclusions from Standards

None

## 12. Surge Immunity Test

**Test result**                      **Pass**

### 12.1 Severity Level and Performance Criterion

#### 12.1.1 Test level

Level	Open-circuit test voltage +/-10% kV
1	0.5
2	1.0
3	2.0
4	4.0
X*	Special


Notes: 1."X" is an open class. This level can be specified in the product Specification  
2. The gray rows are the selected level. Class 2 is applied to Phase to Phase (L-N)  
Class 3 is applied to Phase to PE (L-PE),(N-PE)

#### 12.1.2 Performance Criterion

Performance criterion **B**

## 12.2 Block Diagram of Test Setup

### 12.2.1 Block Diagram for input a.c. power line

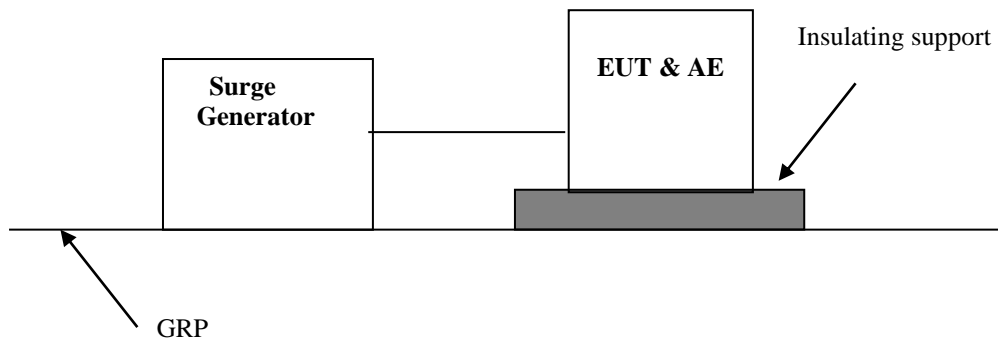

## 12.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC61000-4-5 clause 7.

The test method and equipment was specified by IEC61000-4-5 with modifications by EN55014-2 clause 5.6.

## 12.4 Test Protocol

Temperature : 24 °C

Relative Humidity: 42 %

Test No.	Level [kV]	Polarity +/-	Angle	Line for test	Pass/Fail
1	1	+	90°	a.c. Mains (line to line)	Pass
2	1	-	270°	a.c. Mains (line to line)	Pass
3	2	+	90°	a.c. Mains (line to earth)	NA
4	2	-	270°	a.c. Mains (line to earth)	NA

Notes: "NA" means not applicable.

**Observation:** All the functions were operated as normal during and after test.

**Conclusion:** The EUT met the requirements of Performance A

## 12.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of surge test at main terminal is:  $\pm 11.57\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

## 12.6 Additions, Deviations and Exclusions from Standards

None

### 13. Immunity to Conducted Disturbances, Induced by Radio-frequency Fields

**Test result**                      **Pass**

#### 13.1 Severity Level and Performance Criterion

##### 13.1.1 Test level

Frequency range 150kHz – 230MHz or 150kHz – 80MHz		
Level	Voltage level (e.m.f.)	
	U0 [dB(uV)]	U0 (V)
1	120	1
2	130	3
3	140	10
X	Special	Special

Notes: 1. "X" is an open level  
2. The gray row is the selected test level.


##### 13.1.2 Performance Criterion

**Performance criterion A**

### 13.2 Block Diagram of Test Setup


#### 13.2.1 Block Diagram for a.c./d.c input power line

Block Diagram for a.c./d.c input power line

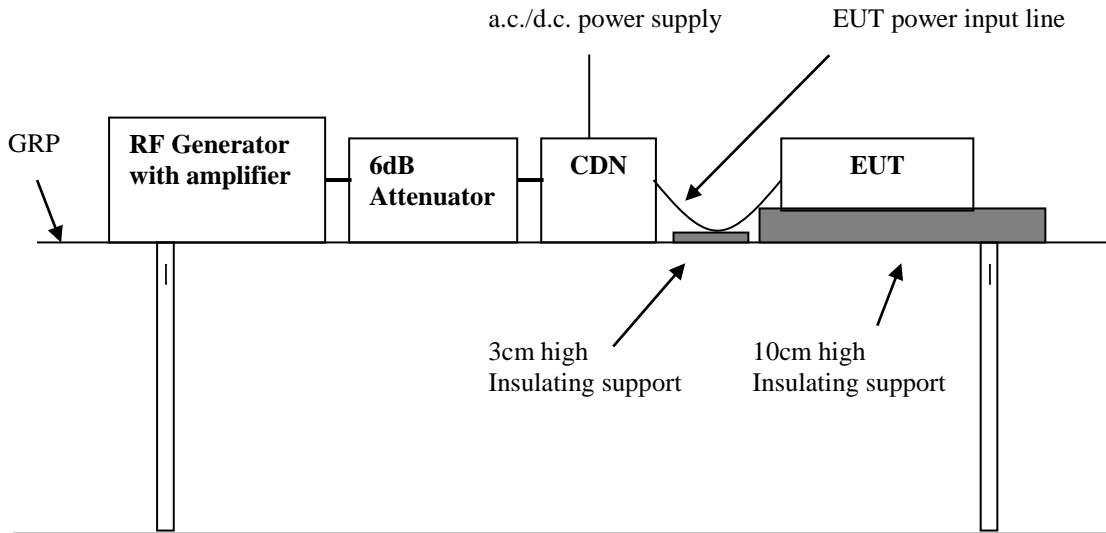


#### 13.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

Unshielded line

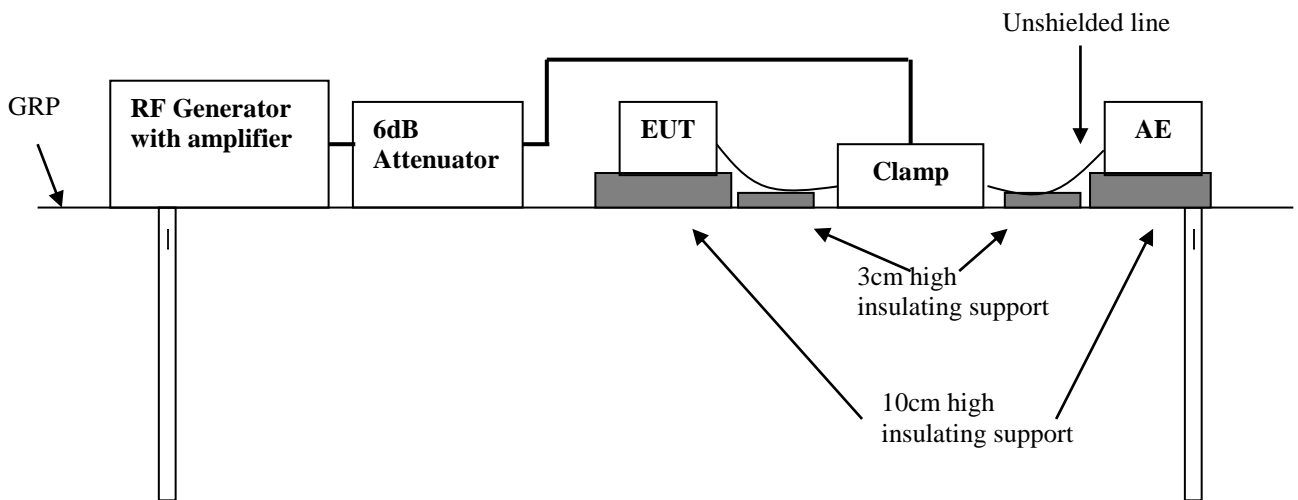



Shielded line

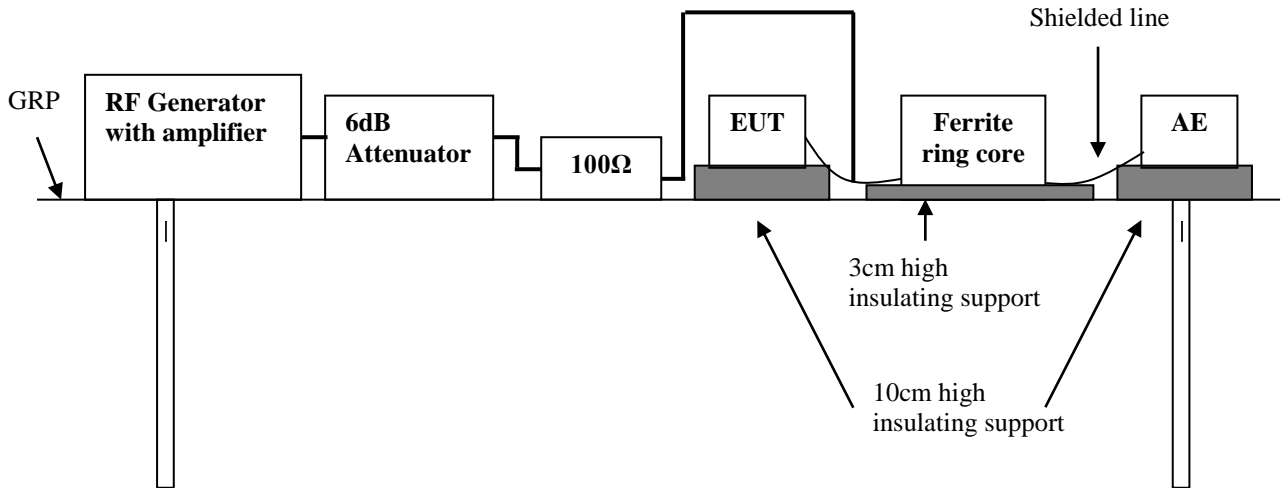

### 13.3 Test Setup and Test Procedure

Measurement was performed in shielded room.  
Measurement and setting of EUT was applied according to IEC61000-4-6 clause 7.  
The test method and equipment was specified by IEC61000-4-6 with additions and modifications by EN55014-2 clause 5.4.

### 13.4 Test Protocol

Temperature : 24 °C  
Relative Humidity: 42 %

EUT is not required for electromagnetic susceptibility

Test No.	Frequency (MHz)	Level V (r.m.s.)	Modulation	Injected point	Result
1	0.15~230	3	1kHz, 80%, SW, AM, 1% step size	a.c. Mains	Pass
2	0.15~230	1	1kHz, 80%, SW, AM, 1% step size	d.c. power ports	-
3	0.15~230	1	1kHz, 80%, SW, AM, 1% step size	signal lines and control lines	-

For EUT test Electromagnetic field susceptibility

1	0.15~80	3	1kHz, 80%, SW, AM, 1% step size	a.c. Mains	-
2	0.15~80	1	1kHz, 80%, SW, AM, 1% step size	d.c. power ports	-
3	0.15~80	1	1kHz, 80%, SW, AM, 1% step size	signal lines and control lines	-

**Observation:** All the functions were operated as normal during and after test.

**Conclusion:** The EUT met the requirements of Performance A

### **13.5 Measurement Uncertainty**

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of injected current test at main terminal is:  $\pm 1.88\text{dB}$ .

Measurement uncertainty of injected current test at unshielded signal terminal  
Is:  $\pm 3.41\text{dB}$ .

Measurement uncertainty of injected current test at shielded signal terminal is under consideration.

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

### **13.6 Additions, Deviations and Exclusions from Standards**

None

## 14. Voltage Dips, Short Interruptions and Voltage Variations Immunity Test

**Test result**                      **Pass**

### 14.1 Severity Level and Performance Criterion

#### 14.1.1 Test level

Test level % U <sub>T</sub>	Voltage dip and short interruptions % U <sub>T</sub>	Duration (in period)	
		50Hz	60Hz
0	100	0.5 cycle	0.5 cycle
40	60	10 cycles	12 cycles
70	30	25 cycles	30 cycles


**Notes:**

1. Voltage change shall occur at zero crossing.
2. U<sub>T</sub> is the rated voltage of the equipment under test.
2. The gray rows are selected test level.

#### 14.1.2 Performance Criterion

Performance C

### 14.2 Block diagram of test setup

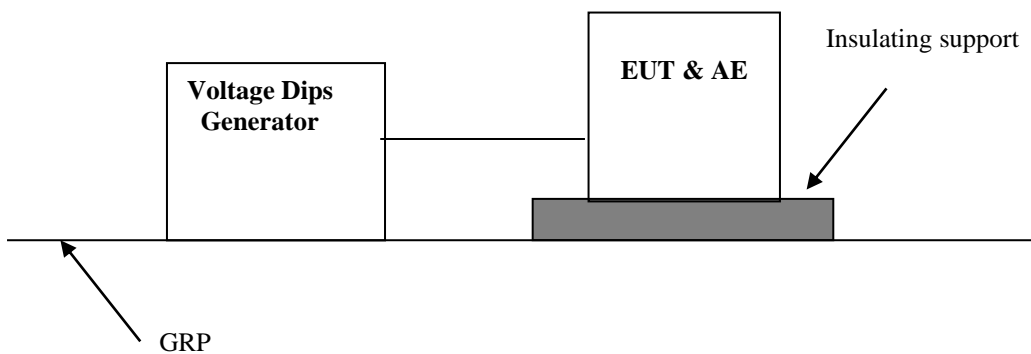

### 14.3 Test Setup and Test Procedure

Measurement was performed in shielded room.  
Measurement and setting of EUT was applied according to IEC61000-4-11 clause 7.  
The test method and equipment was specified by IEC61000-4-11 with additions and modifications by EN55014-2 clause 5.7.

### 14.4 Test Protocol

Temperature : 24 °C  
Relative Humidity: 42 %

Test no.	Test level % UT	Voltage dip and short interruptions % UT	Duration (in periods)	Pass/Fail	Comment
1	70	30%	25 cycles at 50Hz	Pass	-
			30 cycles at 60Hz	Pass	-
2	40	60%	10 cycles at 50Hz	Pass	-
			12 cycles at 60Hz	Pass	-
3	0	100% pos half cycle	0.5 cycle at 50Hz	Pass	-
			0.5 cycle at 60Hz	Pass	-
4	0	100% neg half cycle	0.5 cycle at 50Hz	Pass	-
			0.5 cycle at 60Hz	Pass	-
Note: "NA" means not applicable.					

**Observation:** At test level of 40% and 70%, the EUT worked unsteadily. Once the interference is removed, it recovered its normal mode at once.

**Conclusion:** The EUT met the requirements of Performance B

### 14.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of voltage dips and interruption test is:  $\pm 6.05\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

### 14.6 Additions, deviations and exclusions from standards

None

**Appendix I Photograph of equipment under test**

